





Hand pallet truck


AM 120 / 120p

Lift height: 120 mm / Load capacity: 2000 kg

AM l20 / l20p

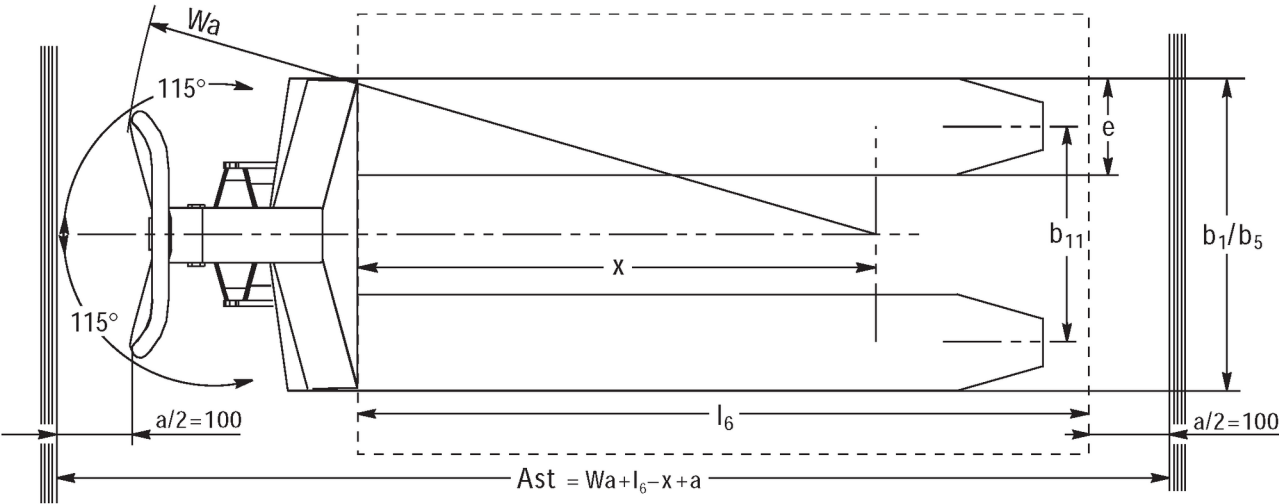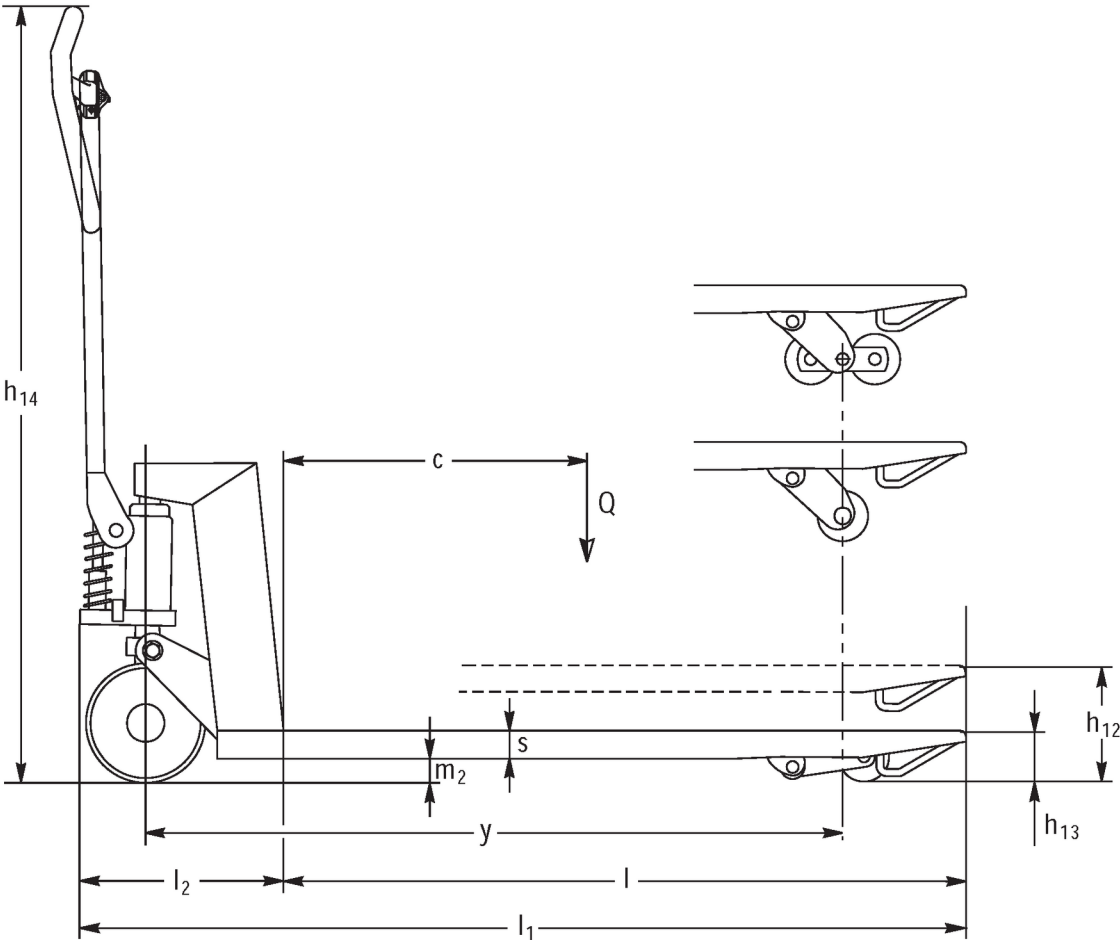


AM 120 / 120p

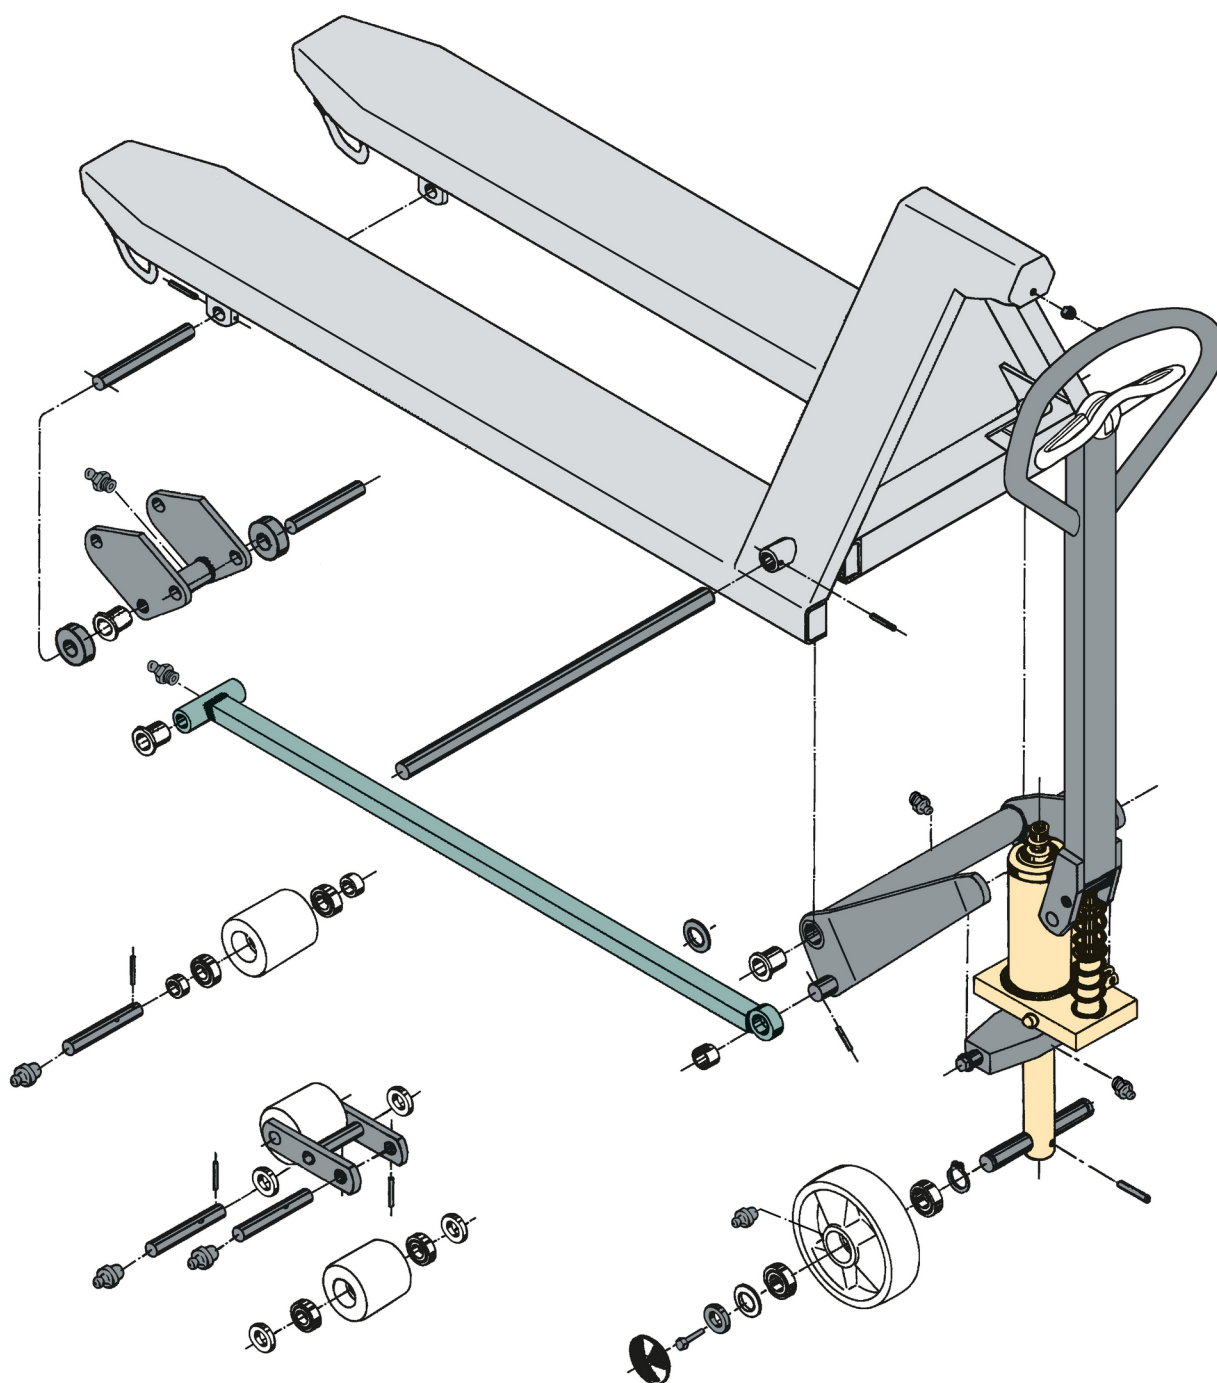

AM 120

AM 120 / 120p

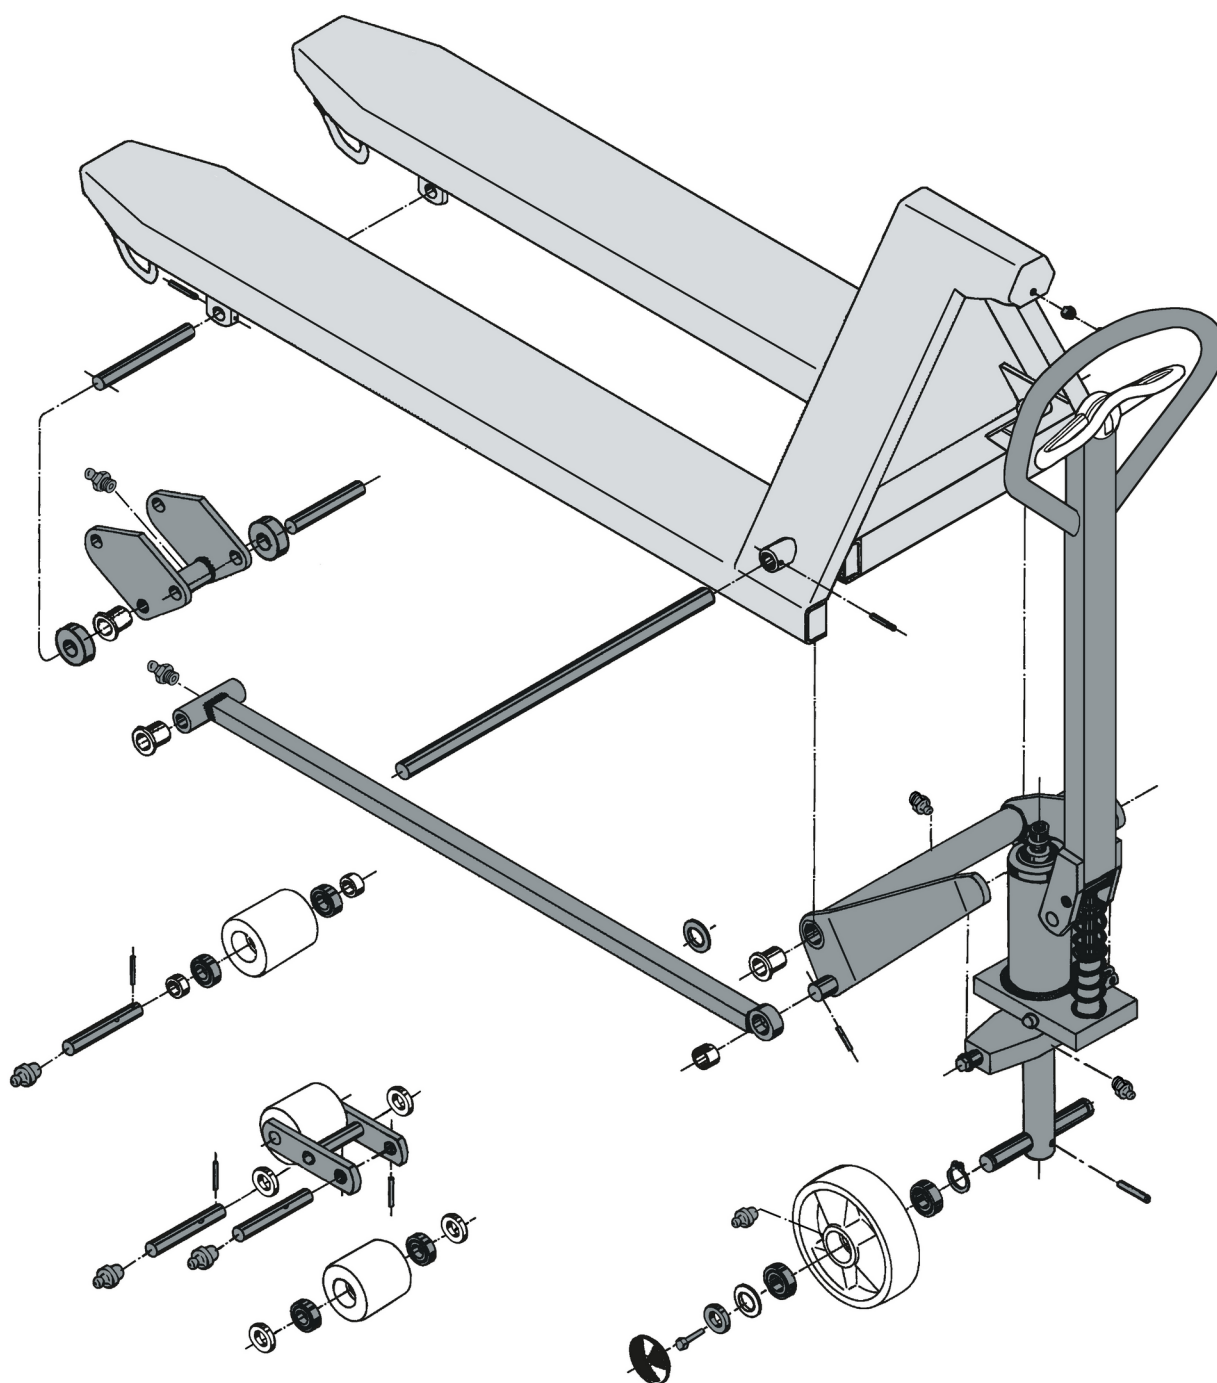

AM 120p

VDI table

Stand-on: 02/2024

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Qkg	2000
	1.6	Load centre distance	cmm	610
	1.9	Wheelbase	ymm	1245
Weights	2.1	tare weight	kg	81
	2.1.1	Service weight (incl. battery)	kg	81
Wheels/suspension system	3.1	Tyres		V-BV
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x70
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10mm	120
	3.7	Tread width, rear	b11mm	520
Basic dimensions	4.4	Lift (h3)	h3mm	120
	4.9	Height of tiller handle in drive position min./max.	h14mm	1170
	4.14	Stand height, elevated	h12mm	205
	4.15	Height, lowered	h13mm	85
	4.19	total length	l1mm	1555
	4.21.1	total width	b1mm	680
	4.22	Fork dimensions	s/e/lmm	51 x 160 x 1220
	4.25	Width across forks	b5mm	680
	4.32	Ground clearance centre of wheelbase	m2mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Astmm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Astmm	1830
	4.35	Turning radius	Wamm	1410
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Qkg	2000
	1.6	Load centre distance	cmm	610
	1.9	Wheelbase	ymm	1245

Weights	2.1	tare weight		kg	81
	2.1.1	Service weight (incl. battery)		kg	81
Wheels/suspension system	3.1	Tyres			N-BN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	610
	1.9	Wheelbase	y	mm	1245
Weights	2.1	tare weight		kg	78
	2.1.1	Service weight (incl. battery)		kg	78
Wheels/suspension system	3.1	Tyres			V-GV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170

	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM 120p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	610
	1.9	Wheelbase	y	mm	1245
Weights	2.1	tare weight		kg	78
	2.1.1	Service weight (incl. battery)		kg	78
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410

Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	570
	1.9	Wheelbase	y mm	1165
Weights	2.1	tare weight	kg	78
Wheels/suspension system	3.1	Tyres		V-BV
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x70
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	520
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	205
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1475
	4.21.1	total width	b1 mm	680
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 1140
	4.25	Width across forks	b5 mm	680
	4.32	Ground clearance centre of wheelbase	m2 mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1810
	4.35	Turning radius	Wa mm	1330
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual

	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	570
	1.9	Wheelbase	y	mm	1165
Weights	2.1	tare weight		kg	78
Wheels/suspension system	3.1	Tyres			N-BN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	570
	1.9	Wheelbase	y	mm	1165
Weights	2.1	tare weight		kg	75
Wheels/suspension system	3.1	Tyres			C-GV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2

	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	570
	1.9	Wheelbase	y	mm	1165
Weights	2.1	tare weight		kg	75
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	34

	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	485
	1.9	Wheelbase	y	mm	995
Weights	2.1	tare weight		kg	72
	2.1.1	Service weight (incl. battery)		kg	72
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1160
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	485
	1.9	Wheelbase	y mm	995
Weights	2.1	tare weight	kg	72
	2.1.1	Service weight (incl. battery)	kg	72
Wheels/suspension system	3.1	Tyres		N-BN
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x65
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	520
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	205
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1305
	4.21.1	total width	b1 mm	680
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 970
	4.25	Width across forks	b5 mm	680
	4.32	Ground clearance centre of wheelbase	m2 mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1810
	4.35	Turning radius	Wa mm	1160
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	485
	1.9	Wheelbase	y mm	995
Weights	2.1	tare weight	kg	69
	2.1.1	Service weight (incl. battery)	kg	69

Wheels/suspension system	3.1	Tyres			V-GV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1160
Performance data					
	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	485
	1.9	Wheelbase	y	mm	995
Weights	2.1	tare weight		kg	69
	2.1.1	Service weight (incl. battery)		kg	66
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970

	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1160
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	405
	1.9	Wheelbase	y	mm	835
Weights	2.1	tare weight		kg	69
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	405
	1.9	Wheelbase	y mm	835
Weights	2.1	tare weight	kg	69
Wheels/suspension system	3.1	Tyres		N-BN
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x65
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	520
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	205
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1145
	4.21.1	total width	b1 mm	680
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 810
	4.25	Width across forks	b5 mm	680
	4.32	Ground clearance centre of wheelbase	m2 mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1810
	4.35	Turning radius	Wa mm	1000
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	405
	1.9	Wheelbase	y mm	835
Wheels/suspension system	2.1	tare weight	kg	65
	3.1	Tyres		V-GV

	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	405
	1.9	Wheelbase	y	mm	835
Weights	2.1	tare weight		kg	65
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810
	4.25	Width across forks	b5	mm	680

	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM 120p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	610
	1.9	Wheelbase	y	mm	1245
Weights	2.1	tare weight		kg	75
	2.1.1	Service weight (incl. battery)		kg	75
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	610
	1.9	Wheelbase	y mm	1245
Weights	2.1	tare weight	kg	75
	2.1.1	Service weight (incl. battery)	kg	75
Wheels/suspension system	3.1	Tyres		N-BN
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x65
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	360
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	205
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1555
	4.21.1	total width	b1 mm	520
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 1220
	4.25	Width across forks	b5 mm	520
	4.32	Ground clearance centre of wheelbase	m2 mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1830
	4.35	Turning radius	Wa mm	1410
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	610
	1.9	Wheelbase	y mm	1245
Weights	2.1	tare weight	kg	72
	2.1.1	Service weight (incl. battery)	kg	72

Wheels/suspension system	3.1	Tyres			V-GV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	610
	1.9	Wheelbase	y	mm	1245
Weights	2.1	tare weight		kg	72
	2.1.1	Service weight (incl. battery)		kg	72
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220

	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Junghheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	570
	1.9	Wheelbase	y	mm	1165
Weights	2.1	tare weight		kg	72
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	570
	1.9	Wheelbase	y mm	1165
Weights	2.1	tare weight	kg	72
Wheels/suspension system	3.1	Tyres		N-BN
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x65
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	360
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	205
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1475
	4.21.1	total width	b1 mm	520
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 1140
	4.25	Width across forks	b5 mm	520
	4.32	Ground clearance centre of wheelbase	m2 mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1810
	4.35	Turning radius	Wa mm	1330
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	570
	1.9	Wheelbase	y mm	1165
Weights	2.1	tare weight	kg	69

Wheels/suspension system	3.1	Tyres			V-GV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	570
	1.9	Wheelbase	y	mm	1165
Weights	2.1	tare weight		kg	69
	2.2	Axle load laden front/rear		kg	636 / 1432
	2.3	Axle load unladen front/rear		kg	21 / 47
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1220 / 1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.20	Length including fork shank	l2	mm	340
	4.21.1	total width	b1	mm	520

	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	485
	1.9	Wheelbase	y	mm	995
Weights	2.1	tare weight		kg	66
	2.1.1	Service weight (incl. battery)		kg	66
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1160
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	485
	1.9	Wheelbase	y mm	995
Weights	2.1	tare weight	kg	66
	2.1.1	Service weight (incl. battery)	kg	66
Wheels/suspension system	3.1	Tyres		N-BN
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x65
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	360
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	205
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1305
	4.21.1	total width	b1 mm	520
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 970
	4.25	Width across forks	b5 mm	520
	4.32	Ground clearance centre of wheelbase	m2 mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1810
	4.35	Turning radius	Wa mm	1160
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	485
	1.9	Wheelbase	y mm	995
Weights	2.1	tare weight	kg	63
	2.1.1	Service weight (incl. battery)	kg	63

Wheels/suspension system	3.1	Tyres			V-GV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1160
Performance data					
	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	485
	1.9	Wheelbase	y	mm	995
Weights	2.1	tare weight		kg	63
	2.1.1	Service weight (incl. battery)		kg	63
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970

	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1160
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	405
	1.9	Wheelbase	y	mm	835
Weights	2.1	tare weight		kg	63
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	335
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	405
	1.9	Wheelbase	y mm	835
Weights	2.1	tare weight	kg	63
Wheels/suspension system	3.1	Tyres		N-BN
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x65
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	335
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	205
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1145
	4.21.1	total width	b1 mm	520
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 810
	4.25	Width across forks	b5 mm	520
	4.32	Ground clearance centre of wheelbase	m2 mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1810
	4.35	Turning radius	Wa mm	1000
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20p
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	405
	1.9	Wheelbase	y mm	835
Weights	2.1	tare weight	kg	59

Wheels/suspension system	3.1	Tyres			V-GV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	335
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data					
	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20p
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	405
	1.9	Wheelbase	y	mm	835
Weights					
	2.1	tare weight		kg	59
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	205
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810

	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	405
	1.9	Wheelbase	y	mm	835
Weights	2.1	tare weight		kg	59
	2.1.1	Service weight (incl. battery)		kg	59
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	34
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	405
	1.9	Wheelbase	y mm	835
Weights	2.1	tare weight	kg	59
	2.1.1	Service weight (incl. battery)	kg	59
Wheels/suspension system	3.1	Tyres		V-GV
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x90
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	360
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	200
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1145
	4.21.1	total width	b1 mm	520
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 810
	4.25	Width across forks	b5 mm	520
	4.32	Ground clearance centre of wheelbase	m2 mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1810
	4.35	Turning radius	Wa mm	1000
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	405
	1.9	Wheelbase	y mm	835
Weights	2.1	tare weight	kg	63
	2.1.1	Service weight (incl. battery)	kg	63

Wheels/suspension system	3.1	Tyres			N-BN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM 120
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	405
	1.9	Wheelbase	y	mm	835
Weights	2.1	tare weight		kg	63
	2.1.1	Service weight (incl. battery)		kg	63
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810

	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM 120
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	485
	1.9	Wheelbase	y	mm	995
Weights	2.1	tare weight		kg	63
	2.1.1	Service weight (incl. battery)		kg	63
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1160
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM 120
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	485
	1.9	Wheelbase	y mm	995
Weights	2.1	tare weight	kg	63
	2.1.1	Service weight (incl. battery)	kg	63
Wheels/suspension system	3.1	Tyres		V-GV
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x90
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	360
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	200
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1305
	4.21.1	total width	b1 mm	520
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 970
	4.25	Width across forks	b5 mm	520
	4.32	Ground clearance centre of wheelbase	m2 mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1810
	4.35	Turning radius	Wa mm	1160
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM 120
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	485
	1.9	Wheelbase	y mm	995
Weights	2.1	tare weight	kg	66
	2.1.1	Service weight (incl. battery)	kg	66

Wheels/suspension system	3.1	Tyres			N-BN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
Performance data	4.35	Turning radius	Wa	mm	1160
	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM 120
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	485
	1.9	Wheelbase	y	mm	995
Weights	2.1	tare weight		kg	66
	2.1.1	Service weight (incl. battery)		kg	66
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970

	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1160
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	570
	1.9	Wheelbase	y	mm	1165
Weights	2.1	tare weight		kg	69
	2.1.1	Service weight (incl. battery)		kg	69
	2.2	Axle load laden front/rear		kg	636 / 1432
	2.3	Axle load unladen front/rear		kg	21 / 47
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.20	Length including fork shank	l2	mm	340
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	570
	1.9	Wheelbase	y	mm	1165
Weights	2.1	tare weight		kg	69
	2.1.1	Service weight (incl. battery)		kg	69
Wheels/suspension system	3.1	Tyres			V-GV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	570
	1.9	Wheelbase	y	mm	1165
Weights	2.1	tare weight		kg	72
	2.1.1	Service weight (incl. battery)		kg	72

Wheels/suspension system	3.1	Tyres			N-BN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	570
	1.9	Wheelbase	y	mm	1165
Weights	2.1	tare weight		kg	72
	2.1.1	Service weight (incl. battery)		kg	72
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140

	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	610
	1.9	Wheelbase	y	mm	1245
Weights	2.1	tare weight		kg	72
	2.1.1	Service weight (incl. battery)		kg	72
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	610
	1.9	Wheelbase	y mm	1245
Weights	2.1	tare weight	kg	72
	2.1.1	Service weight (incl. battery)	kg	72
Wheels/suspension system	3.1	Tyres		V-GV
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x90
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	360
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	200
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1555
	4.21.1	total width	b1 mm	520
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 1220
	4.25	Width across forks	b5 mm	520
	4.32	Ground clearance centre of wheelbase	m2 mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1830
	4.35	Turning radius	Wa mm	1410
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	610
	1.9	Wheelbase	y mm	1245
Weights	2.1	tare weight	kg	75
	2.1.1	Service weight (incl. battery)	kg	75

Wheels/suspension system	3.1	Tyres			N-BN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220
	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	610
	1.9	Wheelbase	y	mm	1245
Weights	2.1	tare weight		kg	75
	2.1.1	Service weight (incl. battery)		kg	75
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	360
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	520
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220

	4.25	Width across forks	b5	mm	520
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	405
	1.9	Wheelbase	y	mm	835
Weights	2.1	tare weight		kg	65
	2.1.1	Service weight (incl. battery)		kg	65
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	405
	1.9	Wheelbase	y mm	835
Weights	2.1	tare weight	kg	65
	2.1.1	Service weight (incl. battery)	kg	65
Wheels/suspension system	3.1	Tyres		V-GV
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x90
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	520
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	200
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1145
	4.21.1	total width	b1 mm	680
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 810
	4.25	Width across forks	b5 mm	680
	4.32	Ground clearance centre of wheelbase	m2 mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1810
	4.35	Turning radius	Wa mm	1000
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	405
	1.9	Wheelbase	y mm	835
Weights	2.1	tare weight	kg	69
	2.1.1	Service weight (incl. battery)	kg	69

Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data					
	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM 120
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	405
	1.9	Wheelbase	y	mm	835
Weights	2.1	tare weight		kg	69
	2.1.1	Service weight (incl. battery)		kg	69
Wheels/suspension system	3.1	Tyres			N-BN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1145
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 810

	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1000
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM 120
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	485
	1.9	Wheelbase	y	mm	995
Weights	2.1	tare weight		kg	69
	2.1.1	Service weight (incl. battery)		kg	69
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1160
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM 120
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	485
	1.9	Wheelbase	y mm	995
Weights	2.1	tare weight	kg	69
	2.1.1	Service weight (incl. battery)	kg	69
Wheels/suspension system	3.1	Tyres		V-GV
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x90
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	520
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	200
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1305
	4.21.1	total width	b1 mm	680
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 970
	4.25	Width across forks	b5 mm	680
	4.32	Ground clearance centre of wheelbase	m2 mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1810
	4.35	Turning radius	Wa mm	1160
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM 120
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	485
	1.9	Wheelbase	y mm	995
Weights	2.1	tare weight	kg	72
	2.1.1	Service weight (incl. battery)	kg	72

Wheels/suspension system	3.1	Tyres			N-BN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1160
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM 120
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	485
	1.9	Wheelbase	y	mm	995
Weights	2.1	tare weight		kg	72
	2.1.1	Service weight (incl. battery)		kg	72
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1305
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 970

	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1160
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	570
	1.9	Wheelbase	y	mm	1165
Weights	2.1	tare weight		kg	75
	2.1.1	Service weight (incl. battery)		kg	75
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	570
	1.9	Wheelbase	y mm	1165
Weights	2.1	tare weight	kg	75
	2.1.1	Service weight (incl. battery)	kg	75
Wheels/suspension system	3.1	Tyres		V-GV
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x90
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	520
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	200
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1475
	4.21.1	total width	b1 mm	680
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 1140
	4.25	Width across forks	b5 mm	680
	4.32	Ground clearance centre of wheelbase	m2 mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1810
	4.35	Turning radius	Wa mm	1330
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	570
	1.9	Wheelbase	y mm	1165
Weights	2.1	tare weight	kg	78
	2.1.1	Service weight (incl. battery)	kg	78

Wheels/suspension system	3.1	Tyres			N-BN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	570
	1.9	Wheelbase	y	mm	1165
Weights	2.1	tare weight		kg	78
	2.1.1	Service weight (incl. battery)		kg	78
Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1475
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140

	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810
	4.35	Turning radius	Wa	mm	1330
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	610
	1.9	Wheelbase	y	mm	1245
Weights	2.1	tare weight		kg	78
	2.1.1	Service weight (incl. battery)		kg	78
Wheels/suspension system	3.1	Tyres			N-GN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	610
	1.9	Wheelbase	y mm	1245
Weights	2.1	tare weight	kg	78
	2.1.1	Service weight (incl. battery)	kg	78
Wheels/suspension system	3.1	Tyres		V-GV
	3.2	Tyre size, front		Ø 200x50
	3.3	Tyre size, rear		Ø 80x90
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	120
	3.7	Tread width, rear	b11 mm	520
Basic dimensions	4.4	Lift (h3)	h3 mm	120
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1170
	4.14	Stand height, elevated	h12 mm	200
	4.15	Height, lowered	h13 mm	85
	4.19	total length	l1 mm	1555
	4.21.1	total width	b1 mm	680
	4.22	Fork dimensions	s/e/l mm	51 x 160 x 1220
	4.25	Width across forks	b5 mm	680
	4.32	Ground clearance centre of wheelbase	m2 mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1830
	4.35	Turning radius	Wa mm	1410
Performance data	5.3	Lowering speed laden/unladen	m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		AM I20
	1.3	Drive		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	2000
	1.6	Load centre distance	c mm	610
	1.9	Wheelbase	y mm	1245
Weights	2.1	tare weight	kg	78
	2.1.1	Service weight (incl. battery)	kg	78

Wheels/suspension system	3.1	Tyres			V-BV
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x90
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220
	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AM I20
	1.3	Drive			Manual
	1.4	Operation			Manual
	1.5	Load capacity/load	Q	kg	2000
	1.6	Load centre distance	c	mm	610
	1.9	Wheelbase	y	mm	1245
Weights	2.1	tare weight		kg	81
	2.1.1	Service weight (incl. battery)		kg	81
Wheels/suspension system	3.1	Tyres			N-BN
	3.2	Tyre size, front			Ø 200x50
	3.3	Tyre size, rear			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2
	3.6	Tread width, front	b10	mm	120
	3.7	Tread width, rear	b11	mm	520
Basic dimensions	4.4	Lift (h3)	h3	mm	120
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170
	4.14	Stand height, elevated	h12	mm	200
	4.15	Height, lowered	h13	mm	85
	4.19	total length	l1	mm	1555
	4.21.1	total width	b1	mm	680
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220

	4.25	Width across forks	b5	mm	680
	4.32	Ground clearance centre of wheelbase	m2	mm	38
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830
	4.35	Turning radius	Wa	mm	1410
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.					

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen. ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**